

VDE license number 40043961/40054118



Specifications Per

- IEC 60115-1 • AEC-Q200 Rev.D
- IEC 62368-1:2018, Anhang/Annex G.10

Features

- AEC-Q200 Compliant
- Anti-sulfuration test qualified
- Excellent in heat dissipation than chip resistor
- Stronger mechanical structure to endure vibration and thermal shock
- MELF packaging yet capable of high power handling
- Special conductive film enhances anti-surge capability
- Absorbs harmful surge which damages precious devices or components
- SMD-enabled alternative to carbon composition resistors
- **Approved to the safety requirement of EN IEC 62368-1:2020, Anhang/Annex G.10 (except SRM204 type)**
- Products meet RoHS requirements and do not contain substances of very high concern identified by European Chemicals Agency

DIMENSIONS

Type	Body Length (L, mm)	Cap Diameter (D1, mm)	Body Diameter (D2, mm)	Soldering Spot (B, mm)	Net Weight Per 1000 pcs
SRM204	3.52 ± 0.15	1.35 ± 0.1	D1+0.02/ -0.15	0.6 Min.	17 grams
SRM204T	3.52 ± 0.15	1.35 ± 0.1	D1+0.02/ -0.15	0.6 Min.	17 grams
SRM207	5.90 ± 0.20	2.20 ± 0.1	D1+0.02/ -0.2	1.0 Min.	80 grams
SRM207P	5.90 ± 0.20	2.20 ± 0.1	D1+0.02/ -0.2	1.0 Min.	80 grams
SRM101	5.90 ± 0.20	2.20 ± 0.1	D1+0.02/ -0.2	1.0 Min.	80 grams
SRM101T	5.90 ± 0.20	2.20 ± 0.1	D1+0.02/ -0.2	1.0 Min.	80 grams
SRM201	8.50 ± 0.50	3.00 ± 0.2	D1+0.05/ -0.35	1.3 Min.	230 grams
SRM301	10.5 ± 0.50	4.00 ± 0.5	D1+0.05/ -0.45	1.6 Min.	520 grams

GENERAL SPECIFICATIONS

Type	Power Rating (at 70°C)	Maximum Working Voltage*	Maximum Permissible Surge Voltage	Minimum Resistance	Maximum Resistance	Resistance Tolerance	Available Resistance Values
SRM204	1/4W	400V	2,000V	1Ω	1MΩ	±1%~±5%	E-24/E-96
SRM204T	1/2W	450V	4,000V	1Ω	10MΩ	±1%~±5%	E-24/E-96
SRM207	1/2W	600V	6,000V	1Ω	10MΩ	±1%~±5%	E-24/E-96
SRM207P	1/2W	600V	8,000 V	0.1Ω	10MΩ	±1%~±5%	E-24/E-96
SRM101	1W	600V	8,000 V	0.1Ω	10MΩ	±1%~±5%	E-24/E-96
SRM101T	1W	600V	10,000 V	0.1Ω	10MΩ	±1%~±5%	E-24/E-96
SRM201	2W	700V	9,000V	0.1Ω	10MΩ	±1%~±5%	E-24/E-96
SRM301	3W	800V	10,000V	0.1Ω	10MΩ	±1%~±5%	E-24/E-96

For a better life cycle under normal usage, 50% of the rated power is recommended.

Special sizes, values, and specifications not listed available on special order.

For resistance values outside the specified ranges, please contact us.

* Rated Continuous Maximum Working Voltage (RCWV) should be determined from $RCWV = \sqrt{\text{Power Rating} \times \text{Resistance Values Max.}}$ RCWV listed above.

SRM Surge Resistant MELF Resistor

Quality • Reliability
Cost-Down via Innovation

SRM


■ PART NUMBER

Example: SRM204TF16R2TKZTR3K0

SRM204T	F	16R2	TKZ	TR3K0
Type	Tolerance*	Resistance	TCR	Packaging
	F(1%) G(2%) J(5%)	16.2Ω 4-character code containing - 3 significant digits 1 letter multiplier <u>OHM MULTIPLIER</u> R = 1 K = 10 ³ M = 10 ⁶ G = 10 ⁹	3-character code TKZ = Default Product Temperature Coefficient. Information of typical product temperature coefficient can be found in the Technical Summary section of the datasheet.**	5-character code TR = Tape Reel (pieces per reel) <u>SRM204/SRM204T</u> 3K0 = 3,000 pcs 6K0 = 6,000 pcs*** 10K = 10,000 pcs*** <u>SRM207/SRM207P</u> <u>SRM101/SRM101T</u> 2K0 = 2,000 pcs 6K0 = 6,000 pcs*** 10K = 10,000 pcs*** SRM201 2K5 = 2,500 pcs SRM301 2K0 = 2,000 pcs

* Listed values may not be applicable across product types or to all resistance values. Please check with us before placing order.
** For the availabilities of non-default temperature coefficient, please check with us. Reference for TCR letter codes can be found in section (4) of Part Number Construction in the Appendices.
*** upon request

■ POWER DERATING CURVE

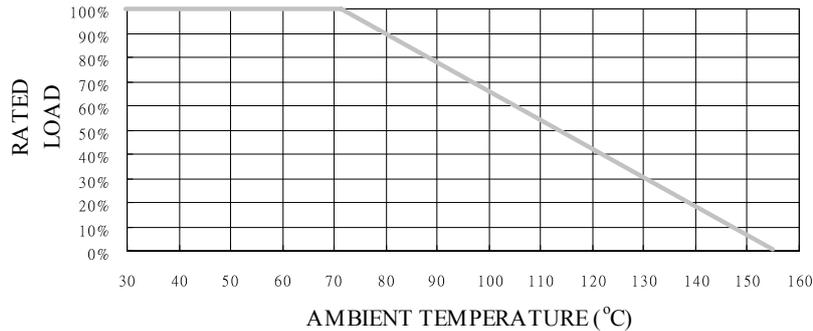

■ TECHNICAL SUMMARY

Characteristics	Ranges & Limits	
Dielectric Withstanding Voltage, VAC or DC	SRM204T SRM204/207/207P/101 SRM201/101T SRM301	300 350 500 800
Temperature Coefficient, PPM / °C*	±200, ±400, ±800, ±1200	
Operating Temperature Range, °C	-55 ~ +155	
Insulation Resistance, MΩ	>10 ⁴	
Tin Whisker (JESD201 Temperature Cycling & High Temp. /Humidity Storage), μm	<5	
Failure Rate in Time, pcs / 10 ⁹ device hours	<1.5	

* Not applicable to all resistance values. Please check with us regarding the PPM of specific resistance value(s).

■ PERFORMANCE SPECIFICATIONS

Characteristics	Test Conditions	Limits
High Temperature Exposure	AEC-Q200 REV D. Stress NO.3 (refer to IEC 60115-1 4.25.3/ MIL-STD-202 Method 108) 1,000 hours at 155°C without load	±(2.5%+0.01Ω)
Temperature Cycling	AEC-Q200 REV D. Stress NO.4 (refer to IEC 60115-1 4.19/ JESD22 Method JA-104) -55°C 30minutes, +125°C 30minutes, 1,000 cycles	±(2%+0.01Ω)
	Proprietary test specification FRC-AECQ-180702 -20°C 30minutes, +120°C 30minutes, 1,000 cycles (Recommended solder paste composition: 96.5% Sn, 3% Ag, 0.5% Cu)	Force of 1kg for 10 secs and without distinct looseness of terminals
Biased Humidity	AEC-Q200 REV D. Stress NO.7 (refer to IEC 60115-1 4.37/ MIL-STD-202 Method 103) 1,000 hours at 85°C and 85% relative humidity with 10% operating power (not over 100V)	±(5%+0.01Ω)
Load Life	IEC 60115-1 4.25.1 Rated load (not over max. working voltage) 1,000 hours with 1.5 hours ON, 0.5 hours OFF, at 70°C	±(5%+0.01Ω)
	AEC-Q200 REV D. Stress NO.8 (refer to MIL-STD-202 Method 108) 1,000 hours at 125°C with de-rated continuous working voltage	±(5%+0.01Ω)
Resistance to Solvents	AEC-Q200 REV D. Stress NO.12 (refer to MIL-STD-202 Method 215) Add Aqueous wash chemical-OKEM Clean or equivalent. Do not use banned solvents.	No visible damage on appearance and marking
Mechanical Shock	AEC-Q200 REV D. Stress NO.13 (refer to MIL-STD-202 Method 213 Condition C) Three shocks in each direction shall be applied along the three mutually perpendicular axes of the test specimen. Peak value: 100 g's, Duration: 6 ms, Velocity change: 12.3 ft/s, Waveform: Half sine	±(0.25%+0.01Ω)
Vibration	AEC-Q200 REV D. Stress NO.14 (refer to MIL-STD-202 Method 204) 5 g's for 20 min., 12 cycles each of 3 orientations, Test from 10 - 2,000 Hz.	±(0.25%+0.01Ω)
Resistance to Soldering Heat	AEC-Q200 REV D. Stress NO.15 (refer to IEC 60115-1 4.18.2/ MIL-STD-202 Method 210) Dip the resistor into a solder bath measured (260±5)°C and hold it for a 10±1 seconds	±(1%+0.01Ω)
ESD	AEC-Q200 REV D. Stress NO.17 (refer to AEC-Q200-002/ ISO/DIS 10605) (150pF/ 2000Ohm discharge network) Human body model, 1 positive & 1 negative discharges with 2KV source	±(0.5%+0.01Ω)
Solderability	AEC-Q200 REV D. Stress NO.18 (refer to J-STD-002 or IEC 60115-1 4.17) Solder area covered after (235±3)°C/(2±0.2) seconds with flux applied	95% min. covered
Board Flex	AEC-Q200 REV D. Stress NO.21 (refer to AEC-Q200-005) 60 sec minimum holding time.	±(0.25%+0.01Ω)
Terminal Strength	AEC-Q200 REV D. Stress NO.22 (refer to AEC-Q200-006) Force of 1.8kg for 60 seconds	±(0.25%+0.01Ω)







PERFORMANCE SPECIFICATIONS

Characteristics	Test Conditions	Limits		
Short Time Overload	IEC 60115-1 4.13 2 seconds 2.5x rated voltage (not over max. working voltage)	±(2%+0.01Ω)		
Climatic test	IEC 60115-1 4.23 4.23.2 - dry heat: 16 hours 150°C 4.23.3 - damp heat: 24 hours 55°C with 95% relative humidity 4.23.4 - cold: 2 hours -55°C 4.23.5 - negative air pressure: 2 hour 8.5kPa at (25±10)°C 4.23.6 - damp heat cyclic: 5 days 55°C with 95% relative humidity 4.23.7 - DC load: rated voltage at -55°C and 150°C each 1 Min.	±(2%+0.01Ω)		
Load Life In Humidity	IEC 60115-1 4.24 56 days rated load (not over max. working voltage) at (40±2)°C and (93±3)% relative humidity	±(5%+0.01Ω)		
Single pulse high voltage overload	IEC 60115-1 4.27 10 pulses of 10/700µs at 10x rated voltage (not over 2x max. working voltage) with interval of 60 sec.	±(1%+0.01Ω)		
Periodic Electric Overload	IEC 60115-1 4.39 3.9x rated voltage (not over 2X max. working voltage) with 0.1s ON, 2.5s OFF for 1,000 cycles	±(1%+0.01Ω)		
Surge Test	Proprietary test specification FRC-TR-010113 = $\sqrt{(6000 \times P \times R)}$ DC P is power rating, R is resistance value, surge voltage is not more than listed at right Surge spec = 1.2/50µs Period = 12 sec Number of surges = 5	SRM204 SRM204T SRM207 SRM101/207P SRM201 SRM301/101T	2KV 4KV 6KV 8KV 9KV 10KV	±(5%+0.01Ω)
Anti-sulfuration test	EIA-977 (conditions B) 750 hours at (105±2)°C without load	±1% ±2% ±5%	±(1%+0.01Ω) ±(2%+0.01Ω) ±(5%+0.01Ω)	

Quality • Reliability
Cost-Down via Innovation



SRM

■ SINGLE SURGE PERFORMANCE

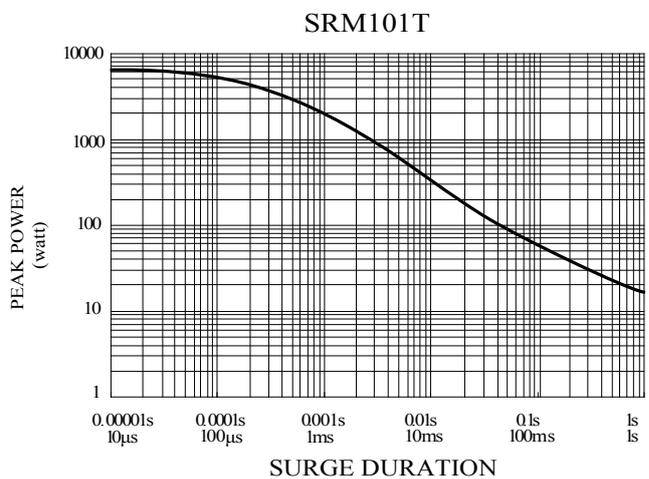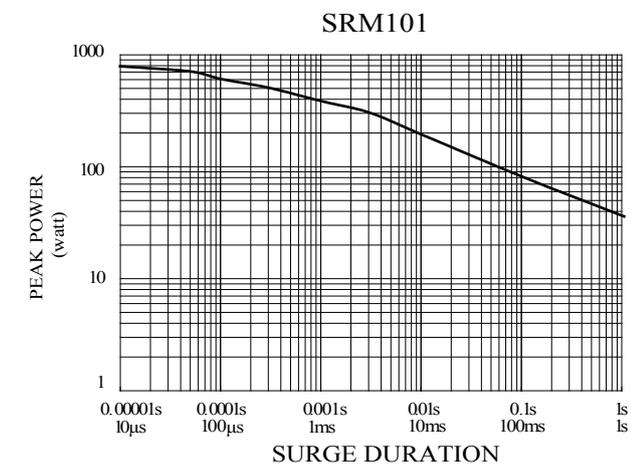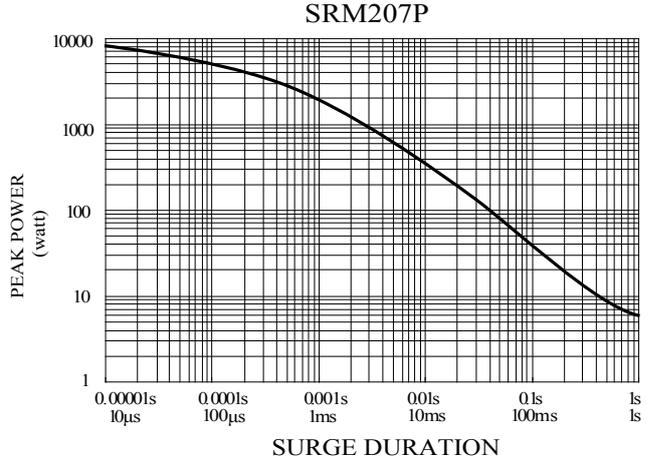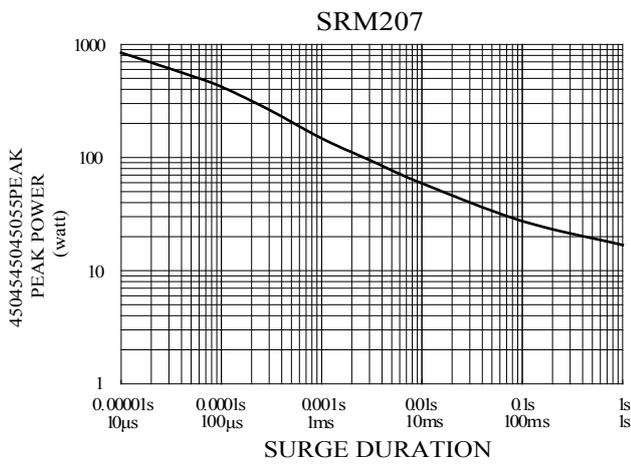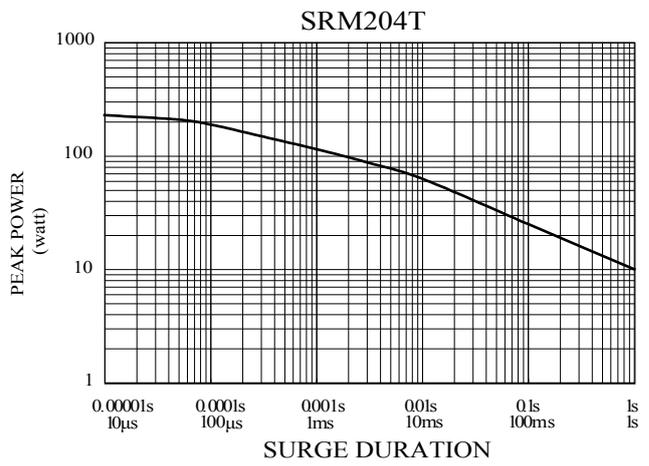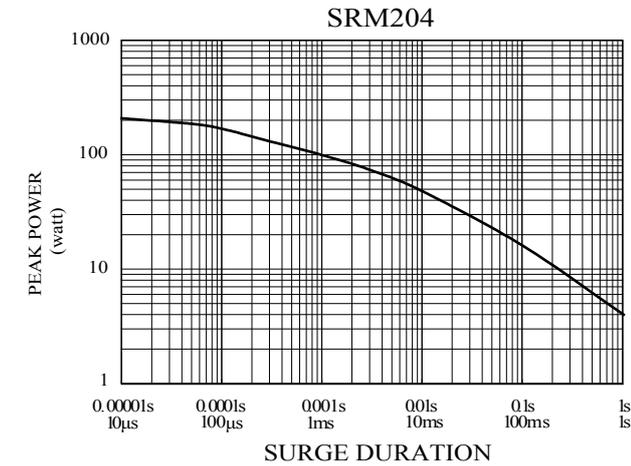


Quality • Reliability
Cost-Down via Innovation

■ SINGLE SURGE PERFORMANCE

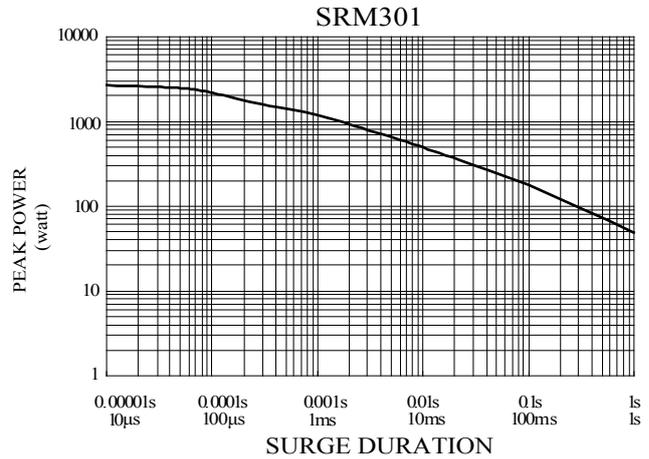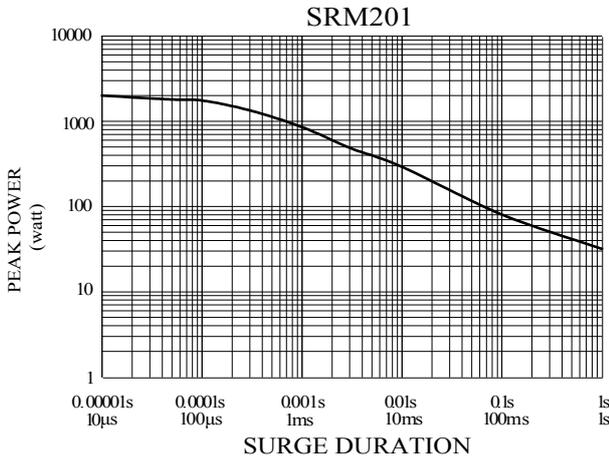

SRM

■ SURGE POWER DERATING CURVE

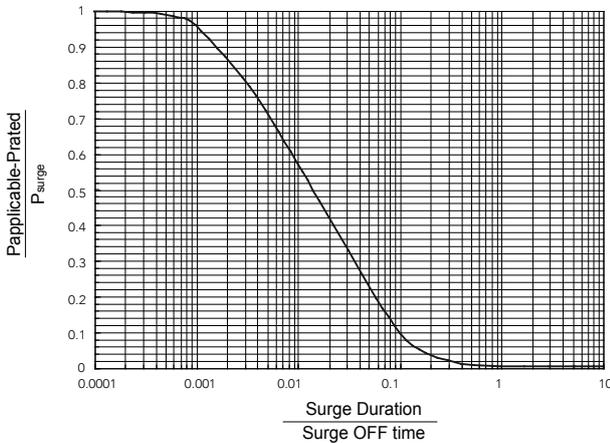


Notes:

- SINGLE SURGE PERFORMANCE graph is good for NON REPETITIVE applications operating in an ambient temperature of 70°C or less. For temperatures above 70°C, the graph power must be derated further linearly down to zero at 150 °C.
- To determine applicable surge power in continuous-surge applications:
 1. Identify allowable duration and peak power P_{surge} of single surge;
 2. Determine ratio of surge duration/surge OFF time in application;
 3. Calculate $P_{applicable}$ backwardly according to Y-axis of SURGE POWER DERATING CURVE.

Quality • Reliability
Cost-Down via Innovation

SRM

■ SUGGESTED PAD LAYOUT

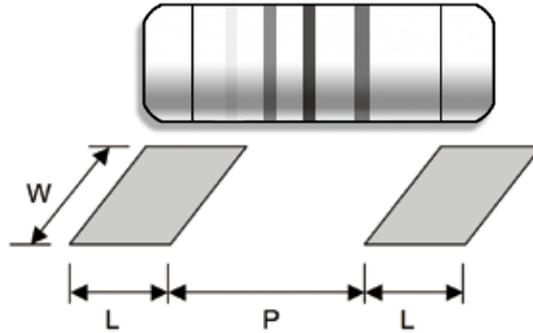

Type	Soldering Mode	Pad Length (L, mm, Min.)	Pad Spacing (P, mm)	Pad Width (W, mm, Min.)
SRM204/SRM204T	Reflow	1.3	1.6 ± 0.1	1.6
	Wave	1.5	1.5 ± 0.1	1.8
SRM207/207P	Reflow	2.0	3.0 ± 0.1	3.0
	Wave	2.5	3.0 ± 0.1	3.0
SRM101/101T	Reflow	2.0	3.0 ± 0.1	3.0
	Wave	2.5	3.0 ± 0.1	3.0
SRM201	Reflow	3.0	4.9 ± 0.3	3.7
	Wave	3.5	4.8 ± 0.3	4.0
SRM301	Reflow	4.0	6.2 ± 0.4	5.0
	Wave	4.5	6.0 ± 0.4	5.0

For better heat dissipation / lower heat resistance, increase W & L.

■ COVER TAPE PEELING SPECIFICATION

Recommended peeling force:

SRM204, SRM204T, SRM207, SRM207P, SRM101, SRM101T: 50±5gf SRM201, SRM301: 70±10gf

